

6. CUT SHEET

EasyTrim Elegance® – Advanced Architectural Aluminum Trim System

PRODUCT OVERVIEW

Cut sheets provide profile-specific dimensions, material thickness, finish options, and standard lengths for the EasyTrim Elegance® Advanced Architectural Aluminum Trim System to support coordination with exterior cladding assemblies.

KEY BENEFITS


- ✓ Clean, refined appearance
- ✓ Multi-Angle flexibility
- ✓ Corrosion resistant
- ✓ Easy to install
- ✓ Non-combustible
- ✓ Recyclable aluminum

SYSTEM COMPATIBILITY

- ✓ ACM Panels
- ✓ Fiber Cement Panels
- ✓ HPL Panels
- ✓ Metal Composite Systems
- ✓ Lap Siding
- ✓ Drained & Ventilated Rainscreens

FINISH OPTIONS

STANDARD FINISHES



CUSTOM COLOR WITH COLORMATCH®




Special Order and Custom Colors; lead time varies depending on project specifics and needs.

POWDER PERFECT SERIES



Performance characteristics are assembly-dependent and apply to the complete wall system; trim components are non-structural accessories.

ALUMINUM TRIM SYSTEM PROFILES

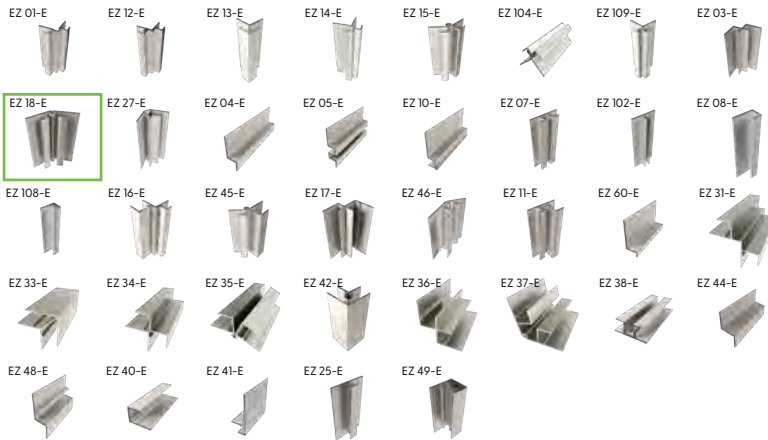

ATTACHMENT

Fasteners

Nails: 1 1/4" or greater (based on job requirements), hot-dipped galvanized ring-shank.

Screws: 3/4" or greater (based on job requirements), self-drilling galvanized/stainless steel wafer head screw.

⚠ Refer to individual profile cut sheets for detailed dimensions and tolerances.

DESIGN RESOURCES



CAD DETAILS




SPEC CLAUSES



INSTALLATION
GUIDE



SCAN TO ACCESS
DRAWINGS, DETAILS
& MORE.

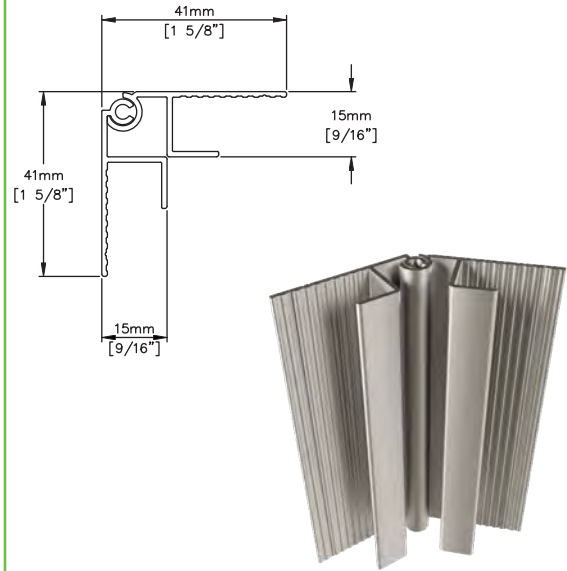

EZ 18-E MULTI-ANGLE INSIDE CORNER 5/16" TRIM

TECHNICAL SPECIFICATIONS

PHYSICAL DATA

Material	6063-T6 Extruded Aluminum
Thickness	0.050 in (1.27 mm) ± tolerance
Finish	Clear Anodized, Black Anodized, Primed, PowderPerfect™ Powder Coat, Factory ColorMatch®
Warranty	15-Year Limited Warranty
Length	10'-0" (3048 mm)
Weight (lb/ft)	~0.50
Quantity	Supplied in standard lengths; quantity as required

TESTING

Fire Rating	Non-combustible per ASTM E136 / CAN/ULC-S114
-------------	--

STANDARDS & ENVIRONMENTAL

Aluminum	ASTM B221
Anodizing	AAMA 611
Powder Coat	AAMA 2604
Environmental	Aluminum recyclable; EPD & HPD available

PERFORMANCE

Rainscreen	Compatible with drained & ventilated assemblies
Pressure Equalized / AAMA 508	Assembly-level only; not applicable to trim alone
Wind Resistance	Assembly-dependent
Water Resistance	Assists with water management; not waterproof
Impact Resistance	Provides panel edge protection